

HC 702 Masking Tape

PRODUCT DATA SHEET



CONSTRUCTION


Substrate: Crepe Paper
Adhesive: Rubber

FEATURES

- 6.5-mil premium grade masking tape
- Suitable for high temperature applications
- A solvent based rubber adhesive system
- Removes cleanly from a variety of surfaces

TYPICAL USES

- Paint masking
- Temporary holding
- Bundling

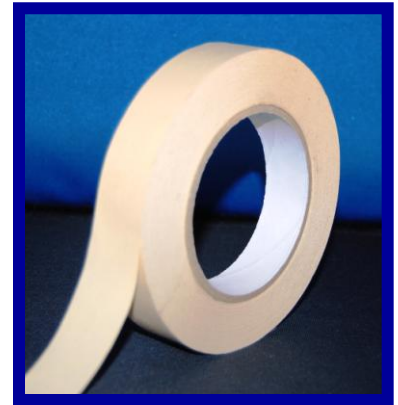

TYPICAL PROPERTIES

Test	Typical Values (English)	Typical Values (Metric)	Test Method
Total Thickness without Liner	0.0065-in	0.1651-mm	PSTC-133
Peel Adhesion to Stainless Steel	28-oz/in	3.1-N/cm	PSTC-101
Tensile Strength	22-lbs/in	39-N/cm	PSTC-131
Elongation	8%	8%	PSTC-131

APPLICATION

Application surface must be clean, dry and free of contaminants.

SHELF LIFE & STORAGE

Under ideal storage conditions of 60°F to 80°F and low humidity, shelf life is one year from date of purchase.

STANDARD CONFIGURATIONS & PACKAGING (CUSTOM CONFIGURATIONS & PACKAGING AVAILABLE UPON REQUEST)

Roll Width	Roll Length	Rolls/Carton	Cartons/Pallet
18-mm	55-m	64	27
24-mm	55-m	48	27
48-mm	55-m	24	27

Physical and performance values and characteristics shown above are obtained through recommended test procedures. The above values do not represent a guarantee of product performance. Values represent nominal and average values; individual roll values may vary from average values indicated on the data sheet. User is responsible for determining suitability and fitness for use. Revision 9.22.2009 14:00.